
















Exploded View

Important! Before proceeding with installation, please check for the most up-to-date instructions at www.thermalright.com

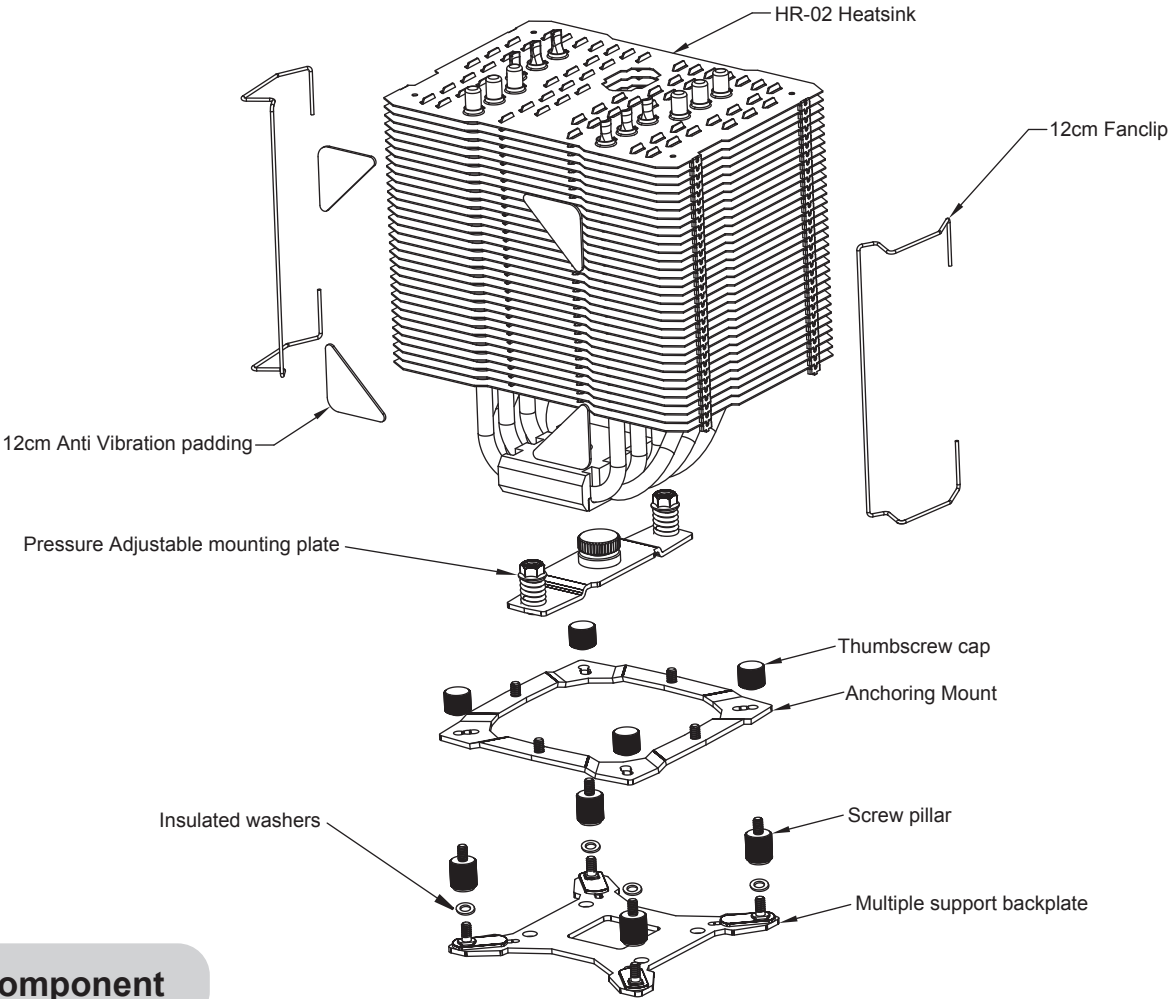


Component

1 	2 	3 	4 	5 	6 	7 
8 	9 	10 	11 	12 	13 	14 
1 HR-02 Heatsink x 1	2 Multiple support backplate x1	3 Insulated washers x4	4 Anchoring Mount x1	5 Pressure vault mounting plate x1	6 Screw pillar x4	7 Thumbscrew x4
9 Wrench x1	10 12cm Fanclip x2	11 14cm Fanclip x2	12 12cm Anti Vibration padding x 4			
13 Thermal paste x 1	14 Screw Driver x 1					

Installation Instructions:


Step 1:

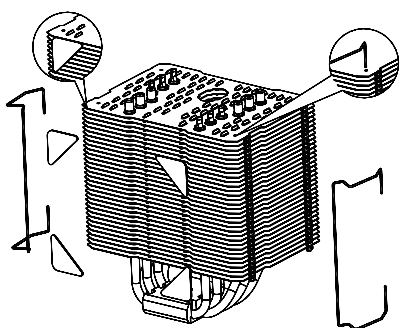

Step 1 : Part Installation

Apply Anti-Vibration Padding to 4 corners on the heatsink, and pull both ends of the Fan clips and make it go through holes on the corners of the heatsink shown in picture.


Step 2:

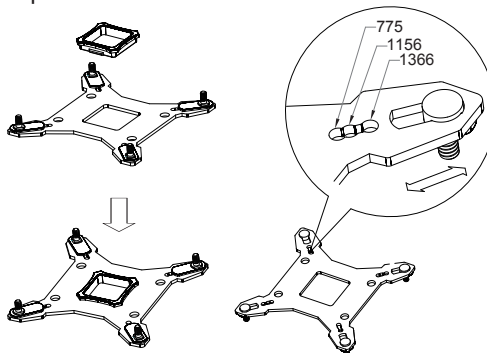

Step 2 : 775 backplate cap and adjustment for the screw pillars on the backplate.

(1).When Installing on the 775 platform, please first insert the backplate cap into the opening on the backplate,make sure you have the cap facing downwards (only for 775)
(2). Adjust the screw pillars to the platform which you are in use.


Step 3:

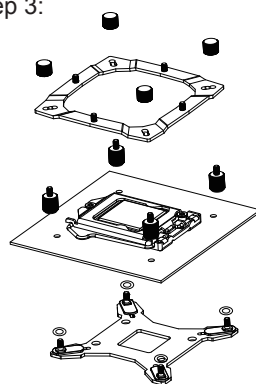

Step 3 : Installtion the Anchoring mount

Place the multiple support Backplate under the motherboard, and then tighten itwith the 4 screw pillars provided, place the anchoring mount onto the 4 screw pillars thensecure it by titening it with 4 thumbscrews.


Step 4:



Step 4 : Applying Thermal Paste


Apply the Thermal Paste to the base of the heatsink and the surface of the cpu evenly.

Step 5:




Step 5 : Make the Mounting plate to go through the heatsink.

Step 6:

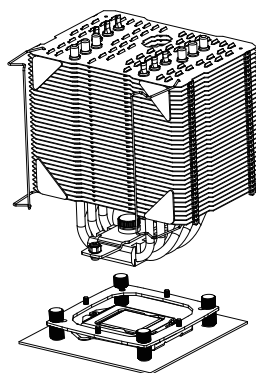


Step 6 : Place the heatsink on top of the cpu, and then tighten the hexagonal screws on both ends of the mouting plate.

Step 7:




Step 7 : Place the 12cm fan onto the heatsink, and then secure it with the 12cm fan clips, plug in power.

Step 8:




Step 8 : Installation completed.

14cm fan Installation:

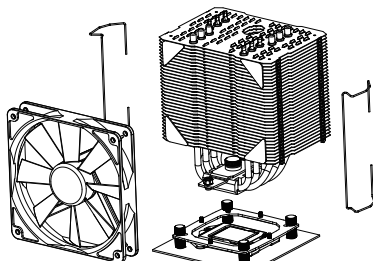



Step 1 : Change it to 14cm fan clip.Installing 14cm fan onto the heatsink, and secure it with 14cm fanclips, plug in power.

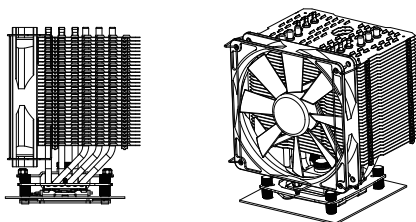

Step 2 : Make sure the fan does not exceed the height on the hexagonal screw on the mounting plate,Installation Completed.

Pressure Vault adjustment :

40~70 lbs. Max pressure of 70 lbs when turned fully clockwise.

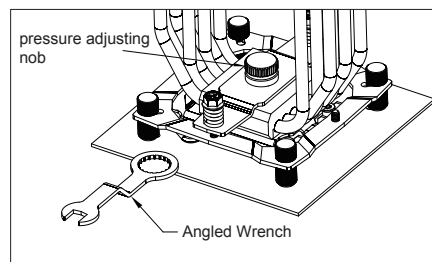

Max. + 70 lbs
Min. - 40 lbs